


Maiwald James
Lärchenweg 12 (Blö)
D - 87654 Friesenried
Tel: 0049 (0)8347/920397

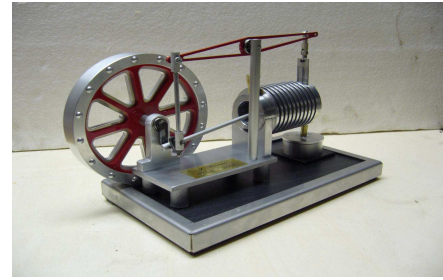

Operating manual

- Starting time about 1 – 3 min.
- After kindling the engine, burning condensate is immediately begin to exist, which is affect slow down to the piston.
This condensate must evaporate for a start to run the engine correct.
- Remedies preheating with a hot-air dryer.
- **Caution:** Fill burner after preheating
- After long operating time let the burner cool down.
- After 10 to 20 operating hours it is needful to clean the cylinder and piston from burning residua.
- To it move the piston to forward dead center, detach the counter nut and unscrew the piston backward.
- Oil economically with heat-resistant oil.
- Fill the burner with a 8 ml injection (burning time about 20 – 25 min.)
- Operate model only under supervision.
- Model is run in. The opening or adjusting from bolt connections can affect the running function negatively.

Lots of fun !!

If you have got questions , suggestion or criticism call under
phone: 0049 (0)8347 / 920397 or mail to : kellergeist71@web.de